

11


11

11

7×24

4008-111-000

1

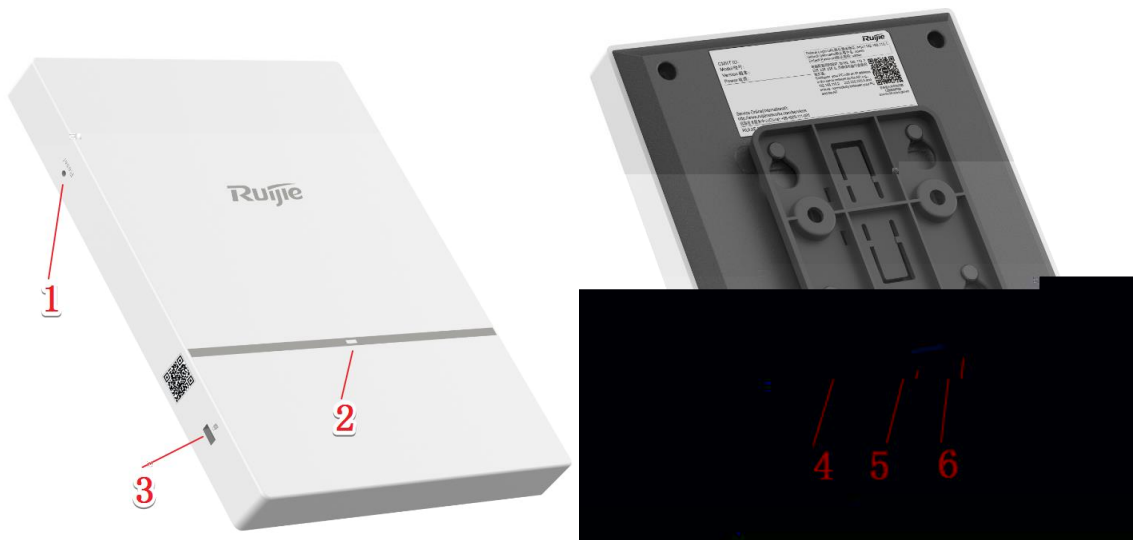

1.3 RG-AP820-L

3Hz		

—		
3Hz		
—		
3Hz	AP	Link down
—		
3Hz		

Hz	1	3Hz	1	3
----	---	-----	---	---

RG-AP820-L DC PoE

43

2

2.1

RG-AP820-L

2.2

AP

500m

2.3

,

2.4

AP

H ₂ S	0.006	0.03
NO ₂	0.04	0.15
NH ₃	0.05	0.15
Cl ₂	0.01	0.3

2.5.5 EMI

2.6


2.7

--	--

3

RG-AP820-L	AP

3.1




3.2

RG-AP820-L

3.3


AP

26.5mm

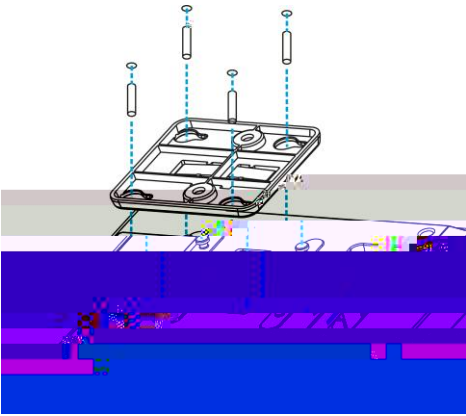

2)


3-3 AP

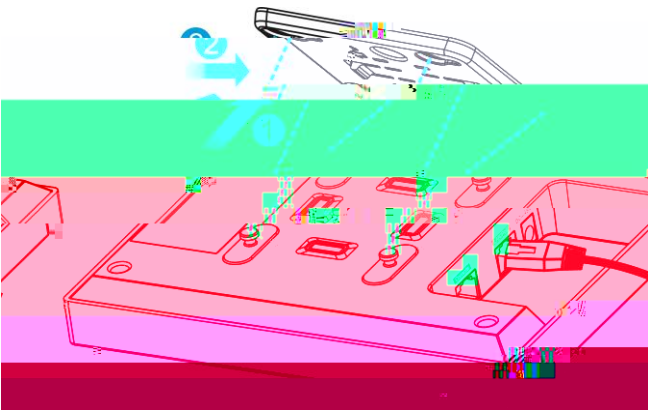

RG-AP820-L


1) 2 6mm 26.5mm

3-4

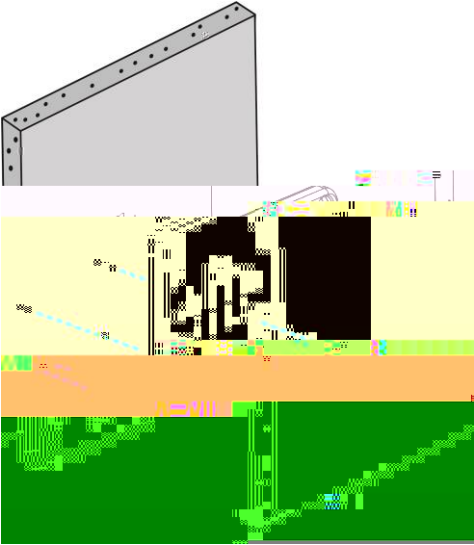


2)

3-5 AP

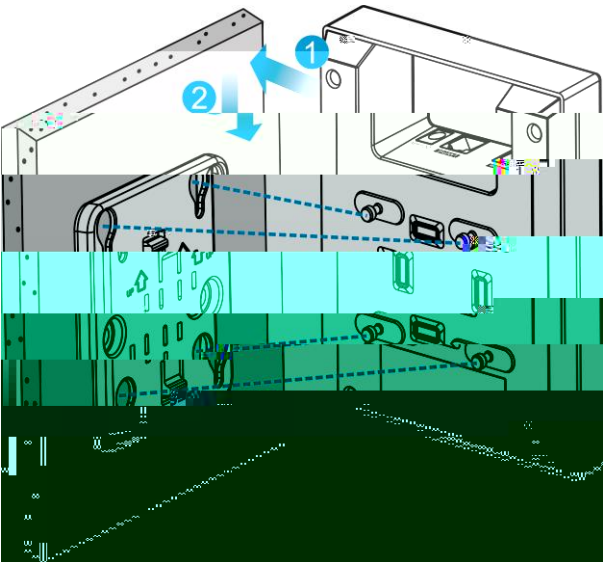

3)

3-6 AP

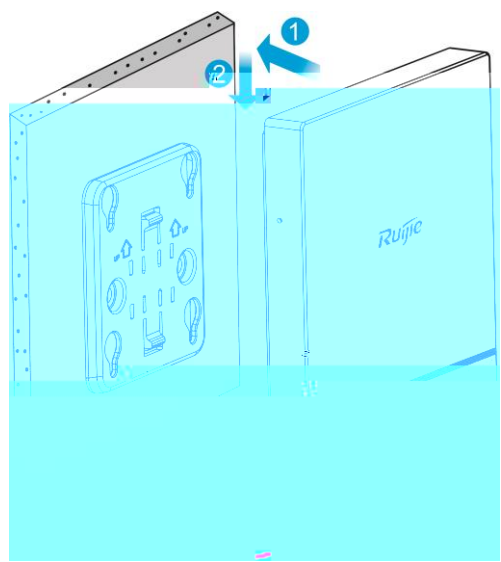


“ Ruijie ” logo

3.5


1

3-7 AP

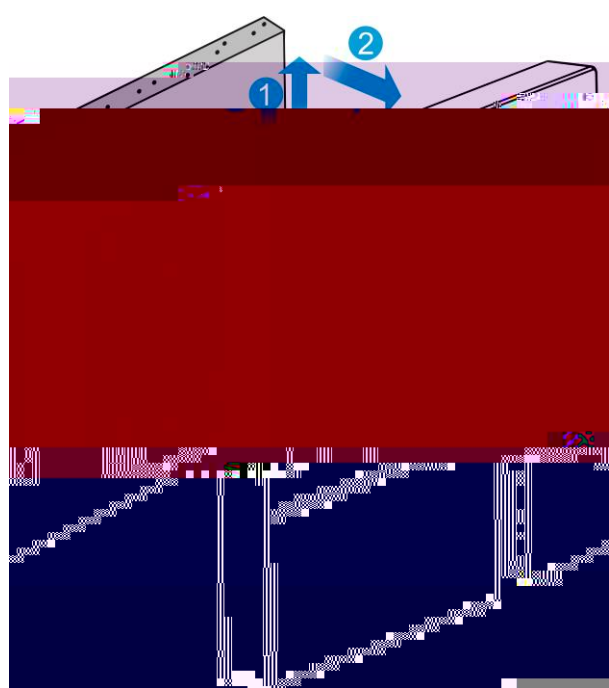

2

-

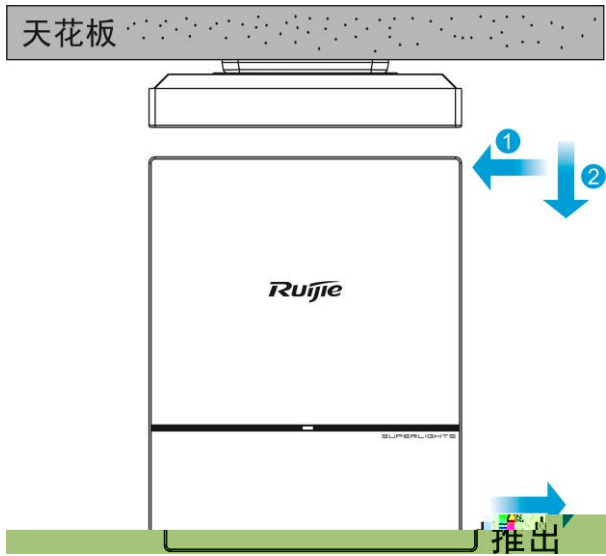

3.6

AP	LAN/PoE	AP	A		
console		9600	8	1	AP

3.7


- 1)
- LAN/PoE
- 2)
- 3)

3.8


AP

4

4.1

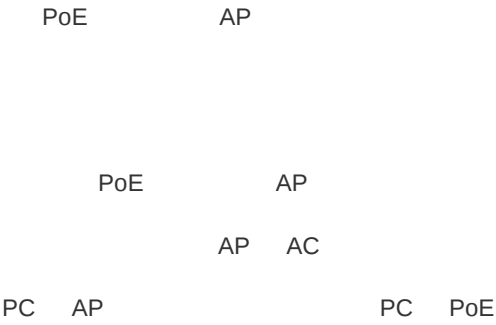

4.2



5

5.1

RG-AP820-L

CLI

RG-AP820-L	AC	
RG-AP820-L	Telnet	RG-AP820-L
RG-AP820-L		


5.2

AP	AP	AP
AP	AP	AC

5.3

6

6.1

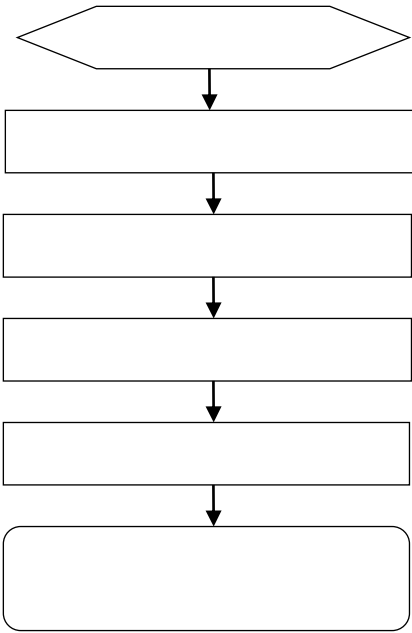

6.2

PoE PoE 802.11af

AP

- 1)
- 1)
- 2) AP


AP

fit

AC

AC

CAPWAP

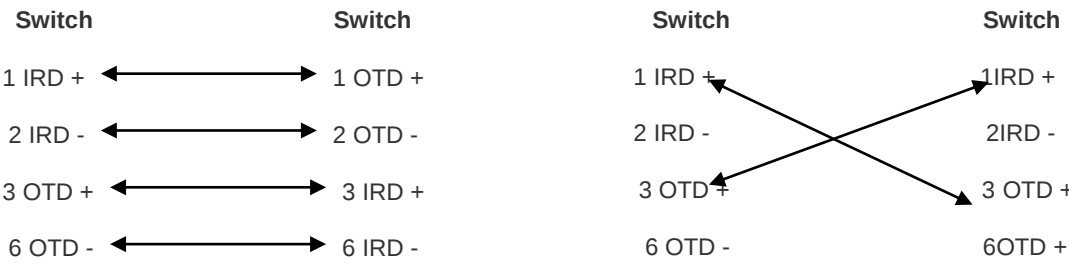

RG-AP820-L

		5	
7			
	7		10
SFP+	5		10

D-1

D-1


30mm

D-2

D-2

D-3

D-3


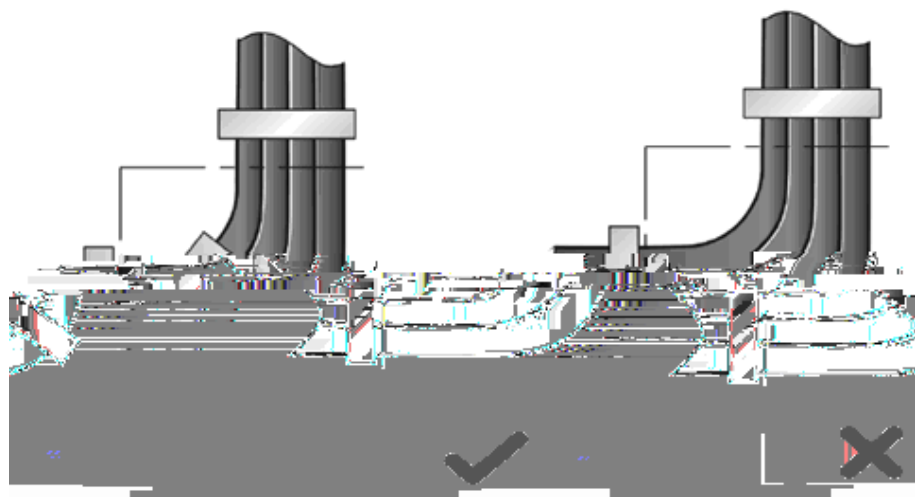


220V

-48V

D-4

D-4

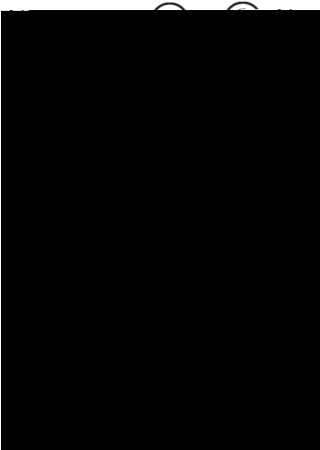

(mm)	(mm)
10	80~150
10~30	150~200
30	200~300

C —

1		1		
2		1		
3		2		



D —

- DC48V 0.3A
- DC

2.1mm	5.5mm	10mm	

