




专 专 专

--802.11ax

D

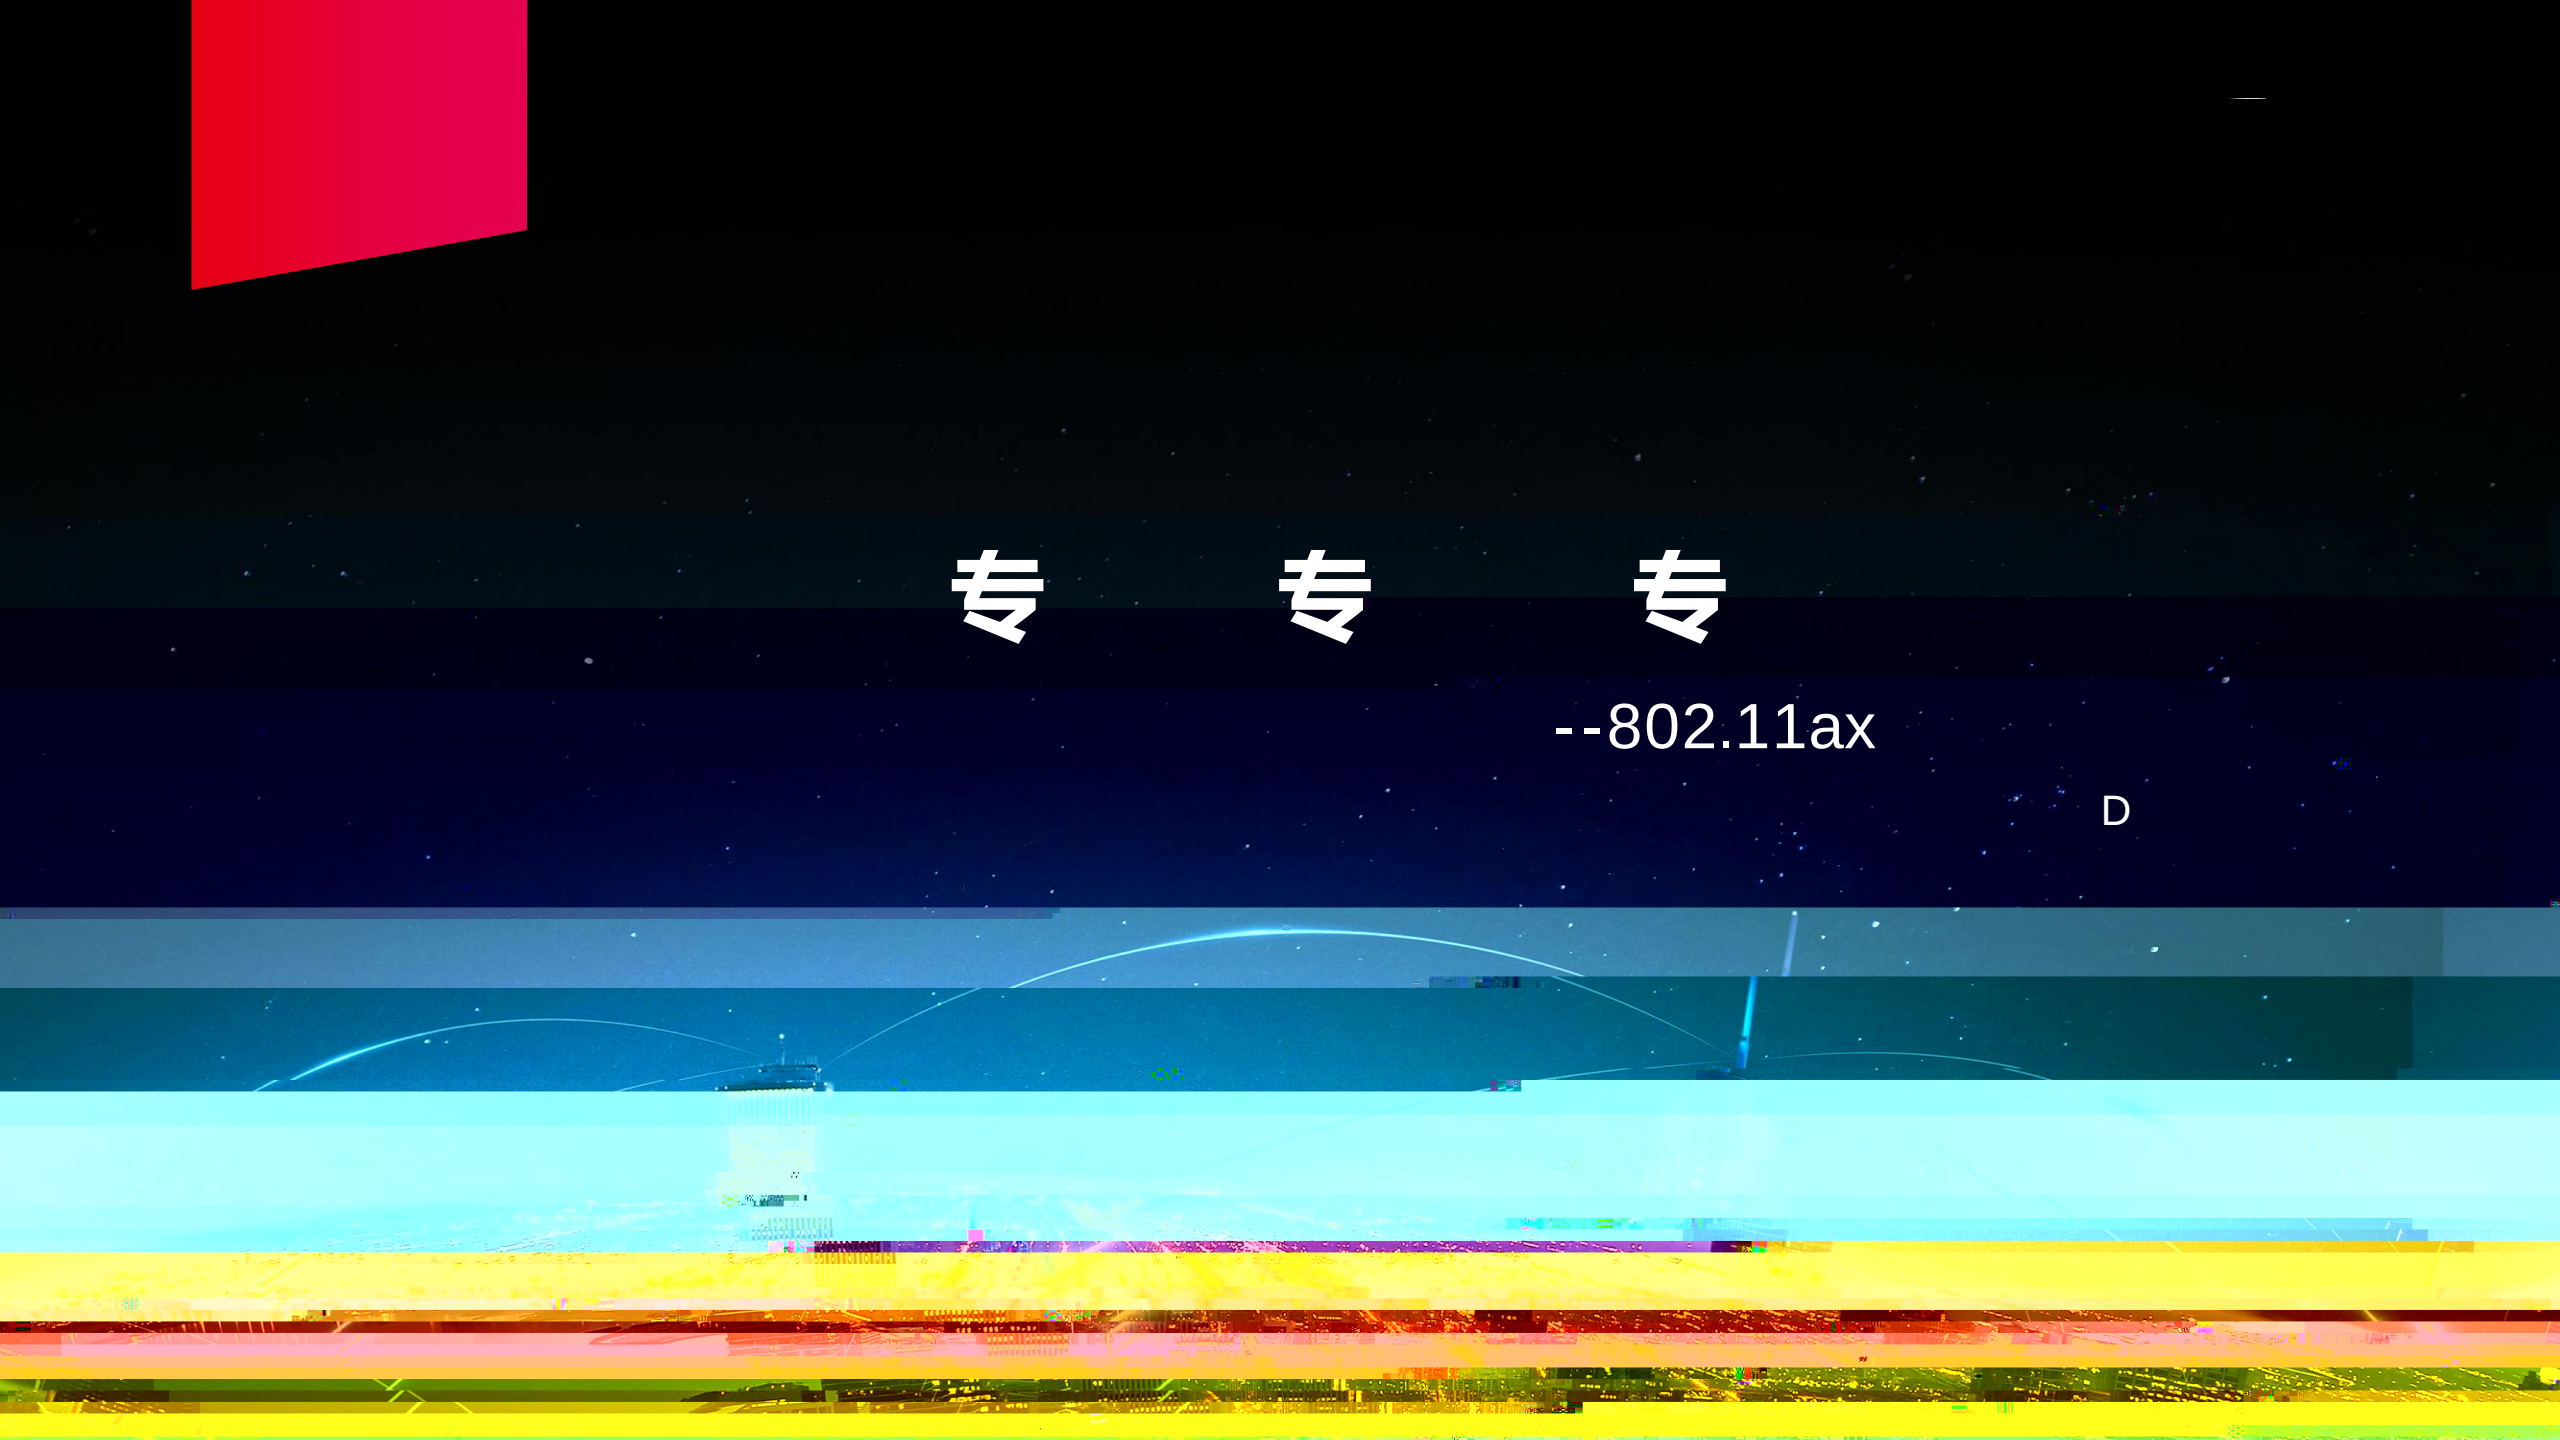

专

802.11ac 256-QAM


专

802.11ac 5GHz 802.11ax
2.4G 5G
802.11a/b/g/n/ac

802.11ac MU-MIMO 802.11ax MU-MIMO UL/DL

专

TWT Target Wakeup Time

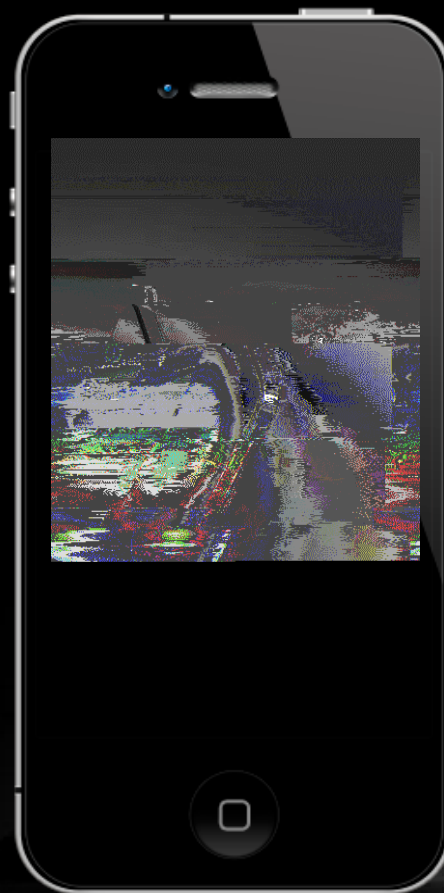



80MHz
160MHz
8

433Mbps

专 专

专

专

专

专

专

专

RG-AP820-A

802.11ax

2.4G



574Mbps

1.7Gbps

5G

AP

1.2Gbps

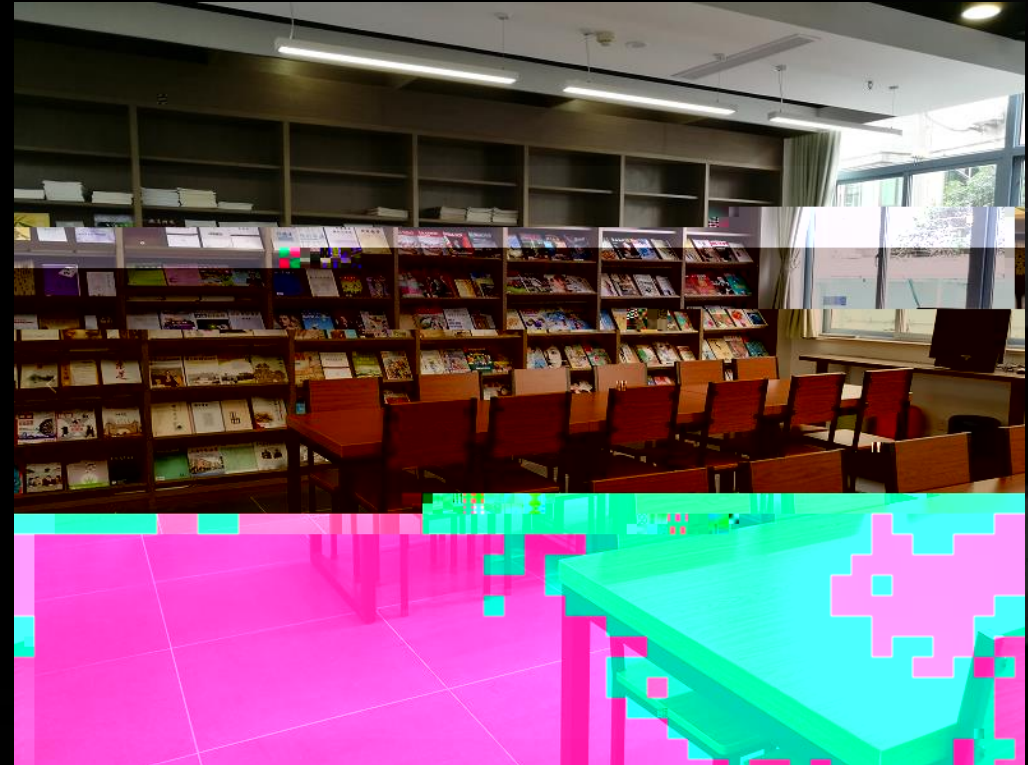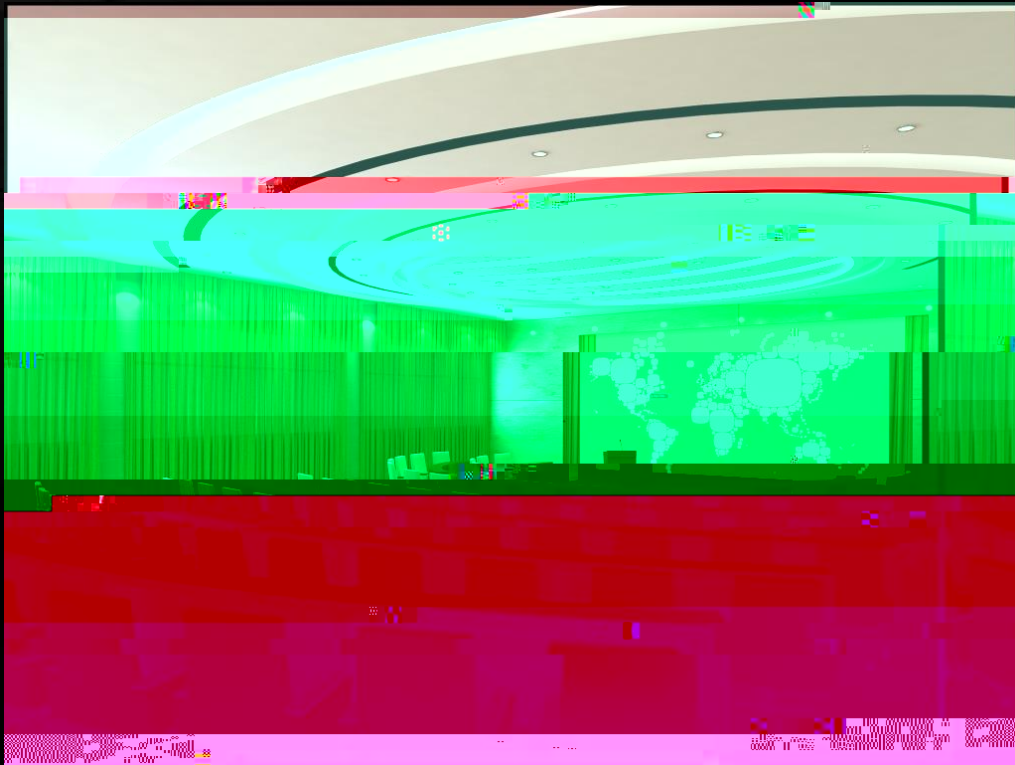


专

专

专

专



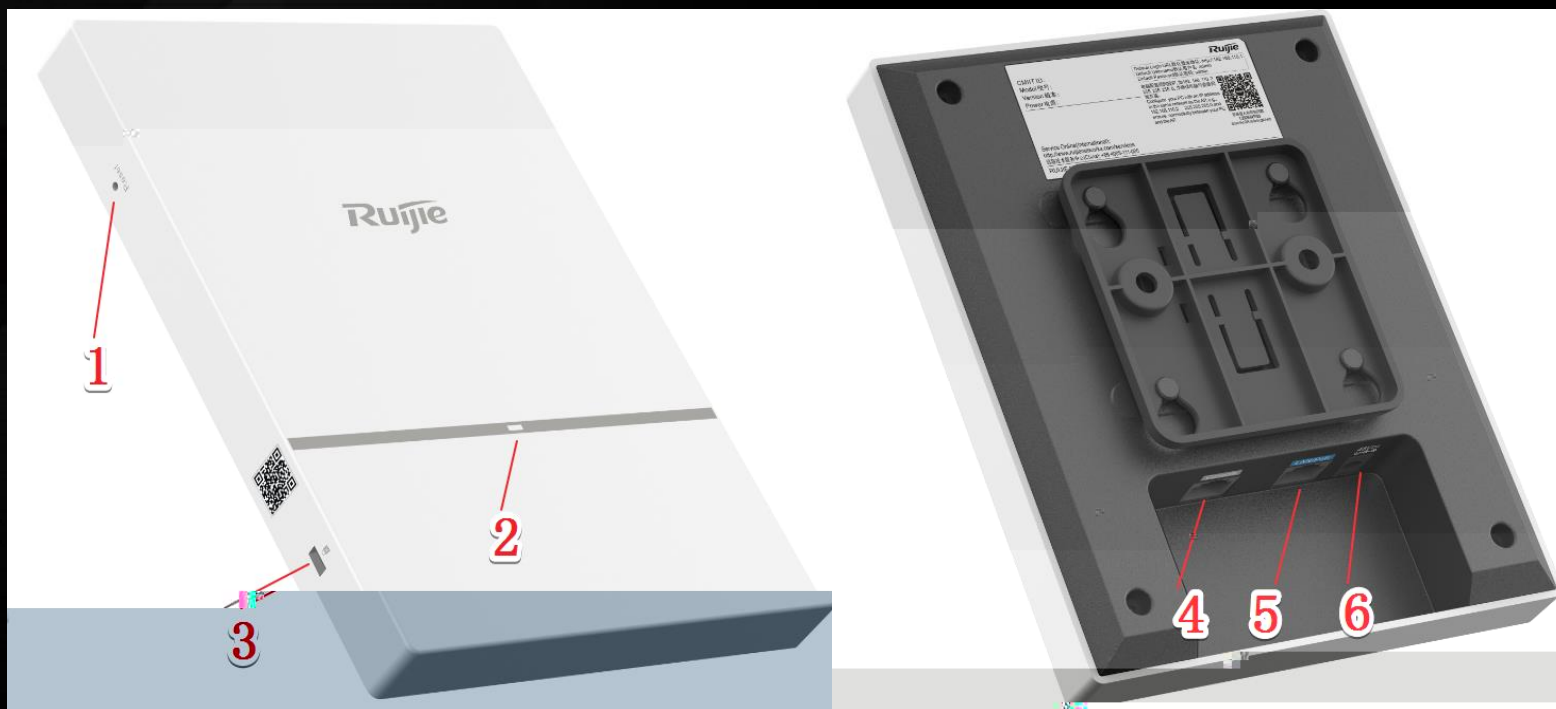


Reset

2S

3S

[illegible][illegible]

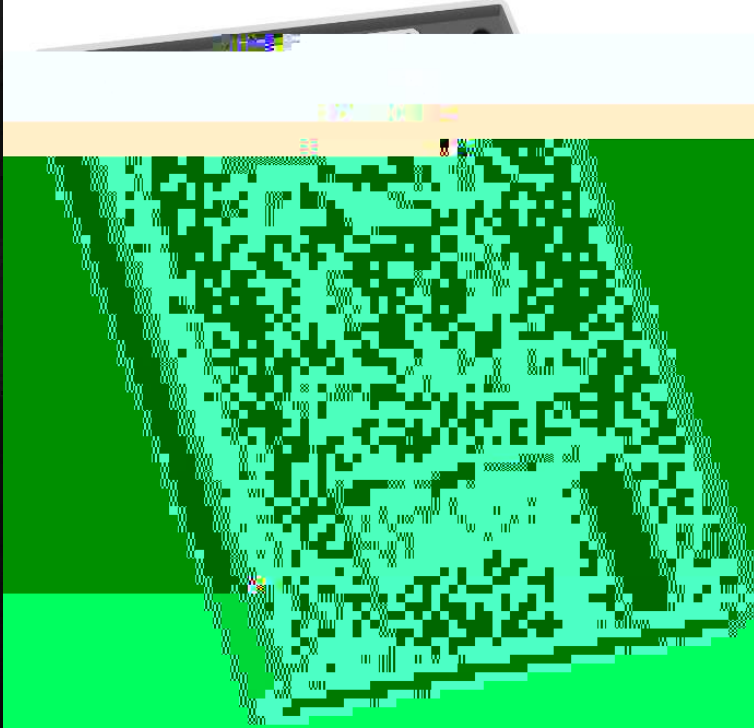

AP820-A







802.3af PoE

- 输入电压：DC48V，额定电流：0.3A ↵
- DC 适配器接头规格：↵

内直径↵	外直径↵	插入深度↵	极性↵
2.1mm↵	5.5mm↵	10mm↵	内正外负↵

↵

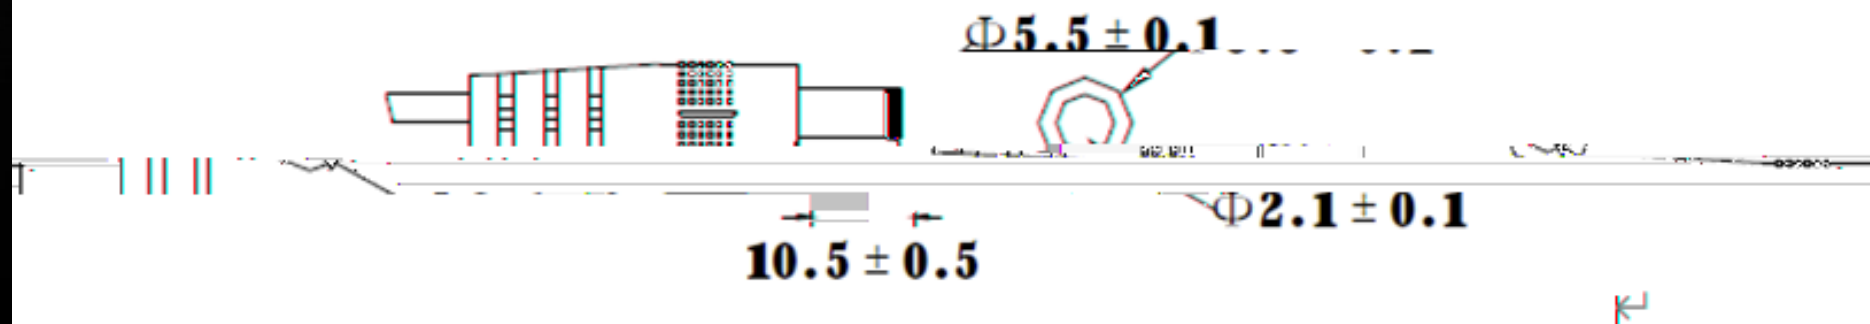

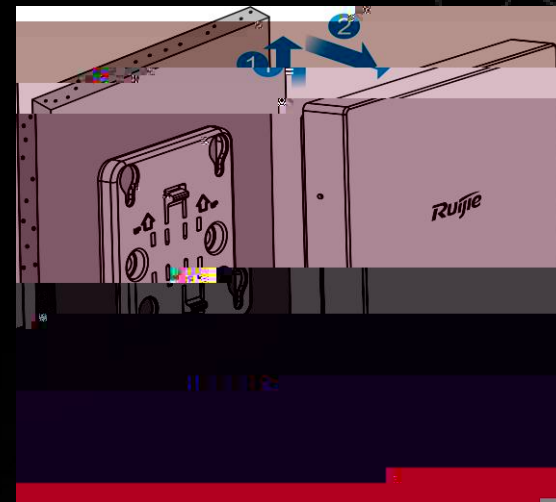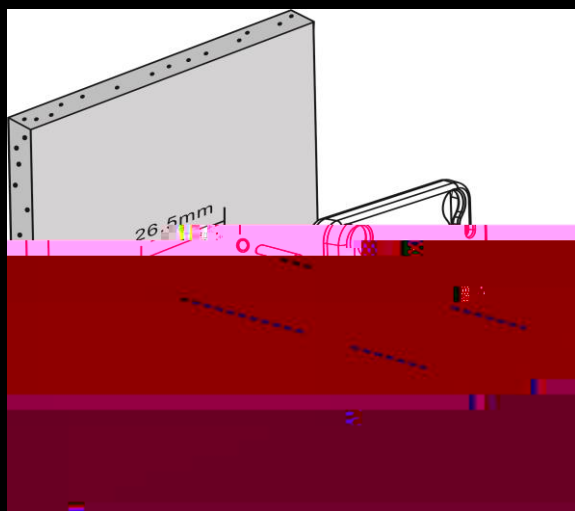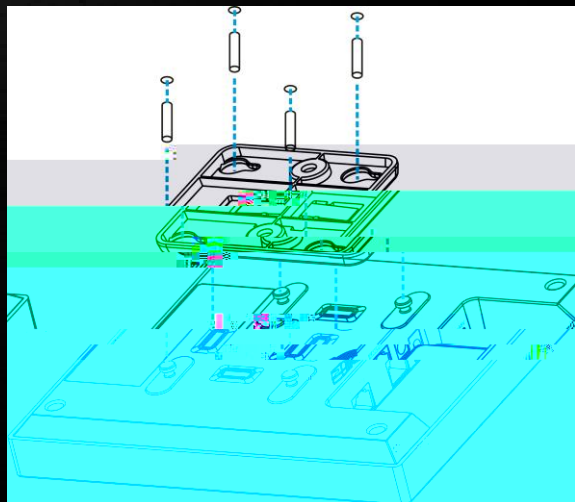



THANKS

29

A 11

100036

Office Tel: 010-5171 5999 Fax: 010-5171 5872

www.ruijie.com.cn