



RG-WALL1600 -M5100E V2.0

V1.0

©2013



7 × 24

<http://www.ruijie.com.cn/>
<http://webchat.ruijie.com.cn>
<http://www.ruijie.com.cn/service.aspx>
4008-111-000
<http://support.ruijie.com.cn>
service@ruijie.com.cn

	RG-WALL1600-M5100E V2.0
	1.0
	PDF

1

RG-WALL1600-M5100E V2.0

IPSec SSL VPN

Web

IPv4 IPv6

NAC SSL

RG-WALL1600-M5100E V2.0

RG-WALL1600-M5100E V2.0

1.1 RG-WALL1600-M5100E V2.0

	RG-WALL1600-M5100E V2.0
	0 to 40°C
	-25 to 70°C
	20% 90% RH
	5.6Kg
	394x 432 x 44.45 L * W * H mm 1RU
	100-240 VAC, 50-60 Hz
	110 V / 3 A, 220 V / 1.5 A
/	34W/40 W
	335 BTU/h

RG-M5100E

RG-WALL1600-M5100E V2.0

1-2



1-2 RG-WALL1600-M5100E V2.0

以太网端口 1 - 38 (RJ-45)

千兆以太网连接

WAN 端口 1 & 2 (RJ-45)

千兆以太网连接

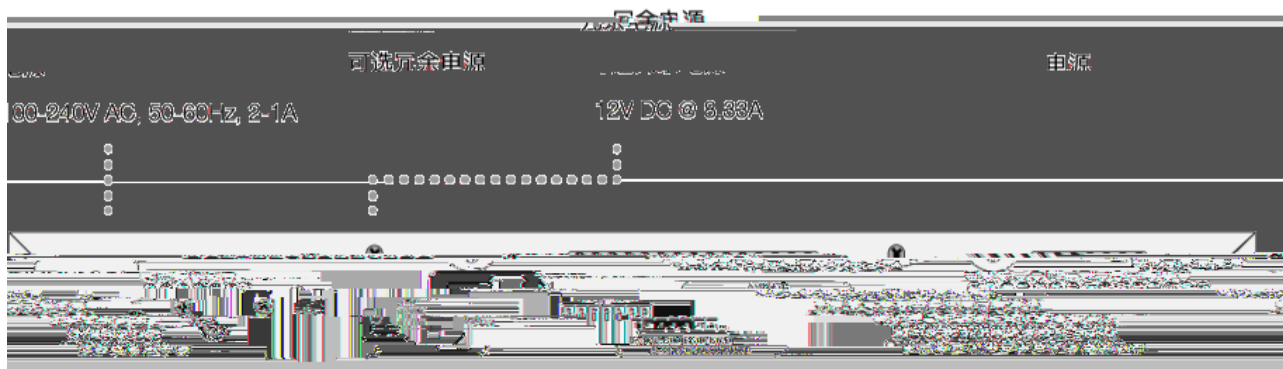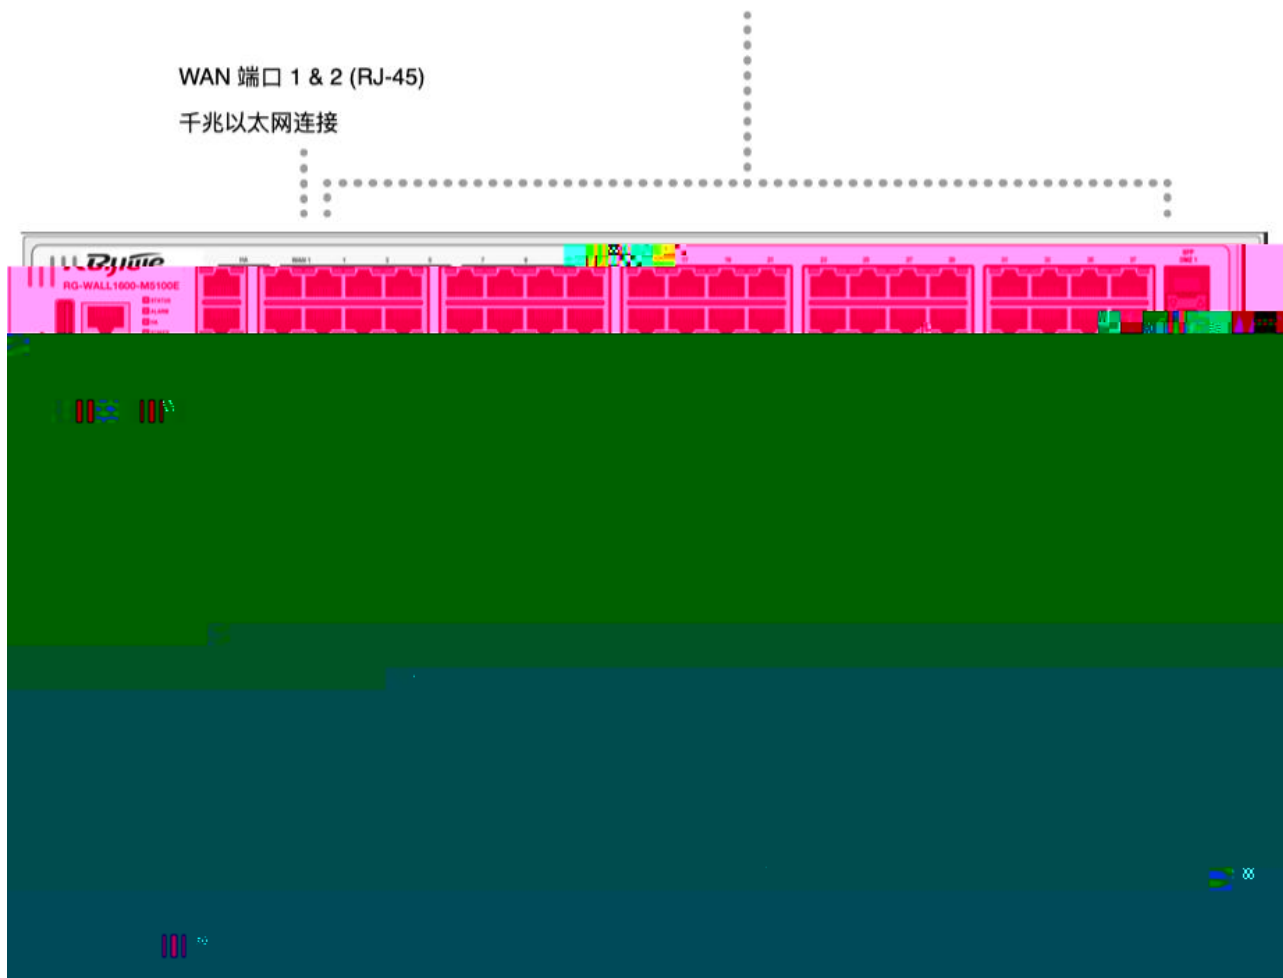

2.2.3

RG-WALL1600-M5100E V2.0

RG-WALL1600-M5100E V2.0

0°C-40°C	20%-90%

1.5M

0.4M

2.2.4

	0.5	1	3	5
/	1.4 x 10	7 x 10	2.4 x 10	1.3 x 10

RG-WALL1600-M5100E V2.0

	mg/m ³	mg/m ³
--	-------------------	-------------------

2.2.7 EMI

2.3

2.4

RG-WALL1600-M5100E V2.0

2.5

	2	2	USB	2	Console	8	4
		SFP			Ř	Ů	û

3.3

5mm

1.5cm

- 1)
- 2)
- 3)
- 4)

IEC60297

19

1RU=44.45mm(1.75inch)

1RU

3-1

RU


Rack Unit

RG-U

WALL1600-M5100E V2.0

RU

3-1

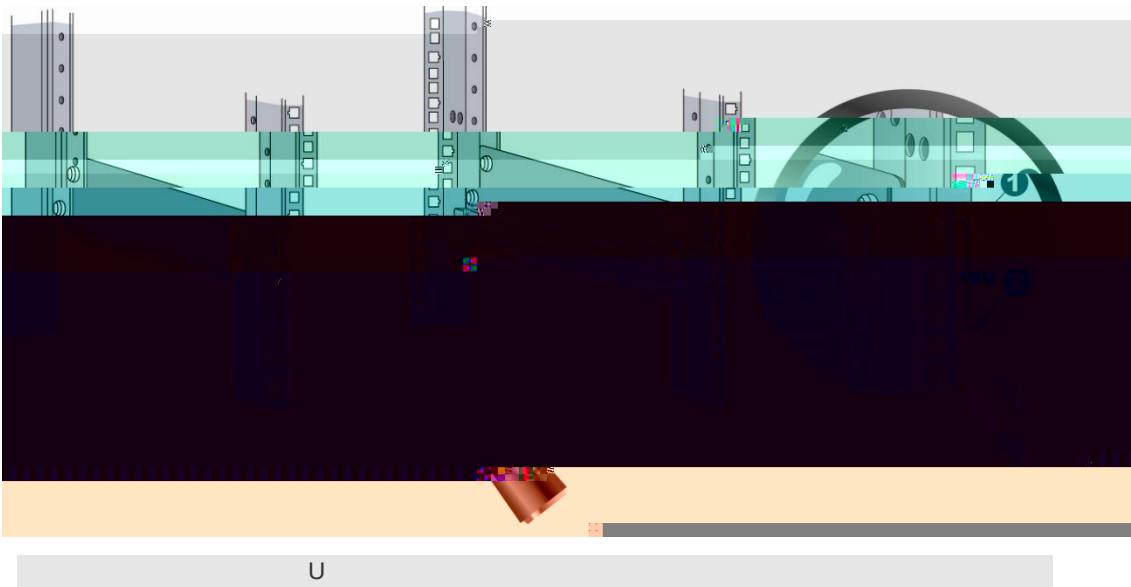

RG-WALL1600-M5100E V2.0
M5100E V2.0

RG-WALL1600-

3.4

RG-WALL1600-M5100E V2.0

10mm

1)

2)

3)

4)

3.7

É

6)


1.

23


SFP

RG-WALL 1600


13)

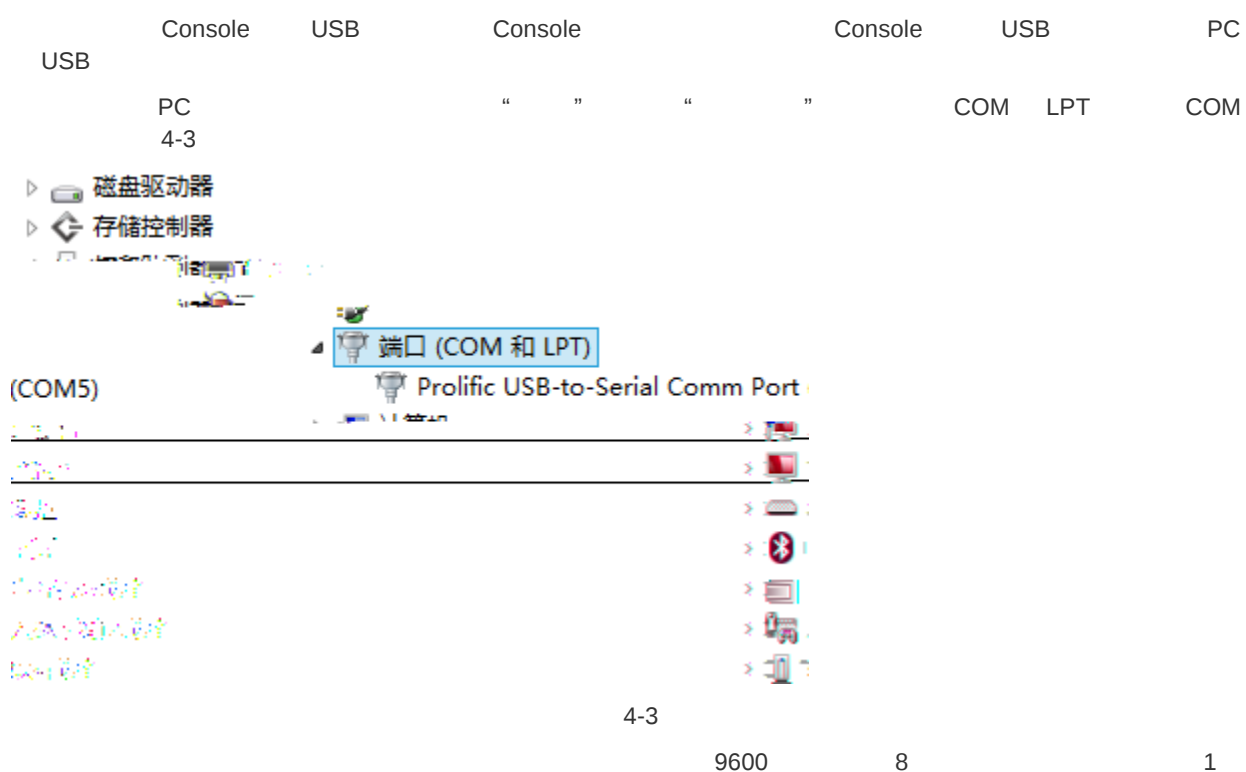


14)

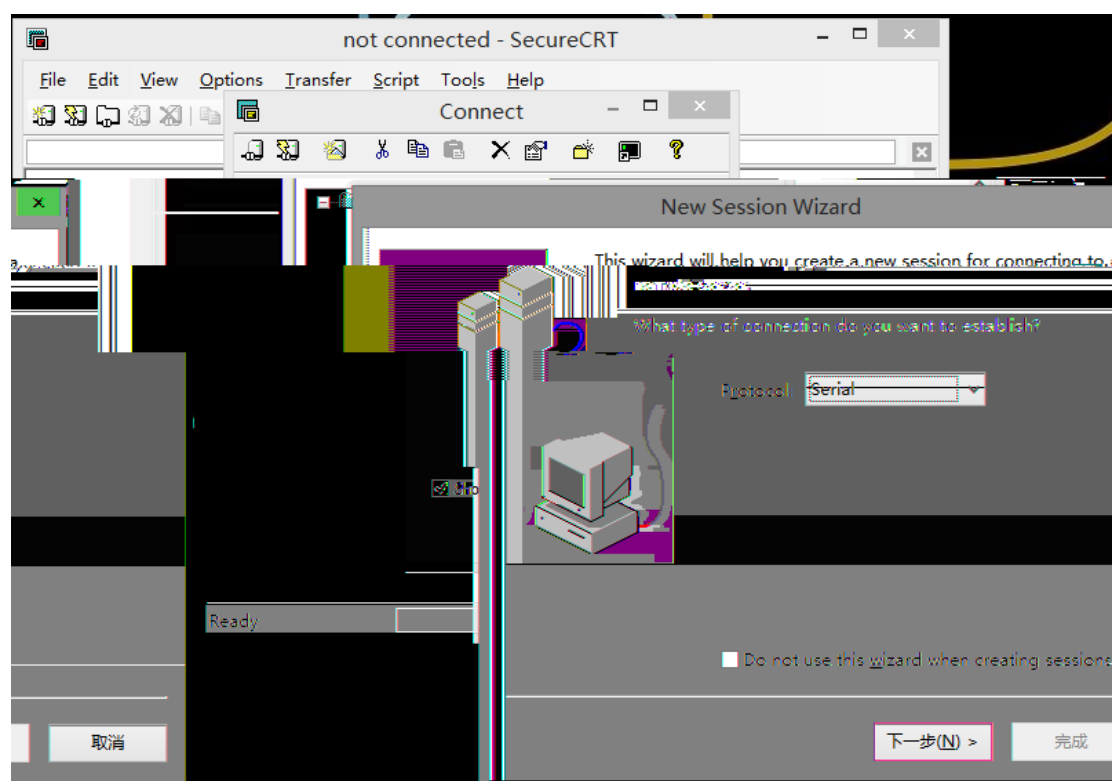

15)

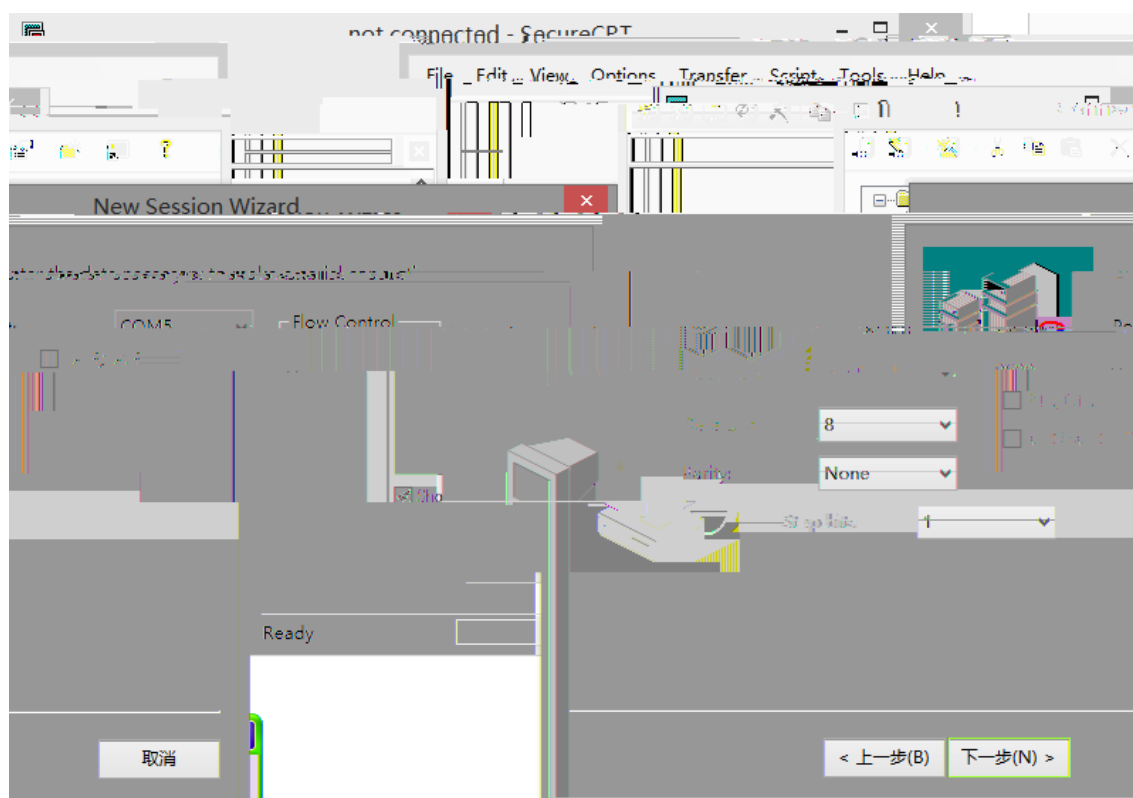

16)

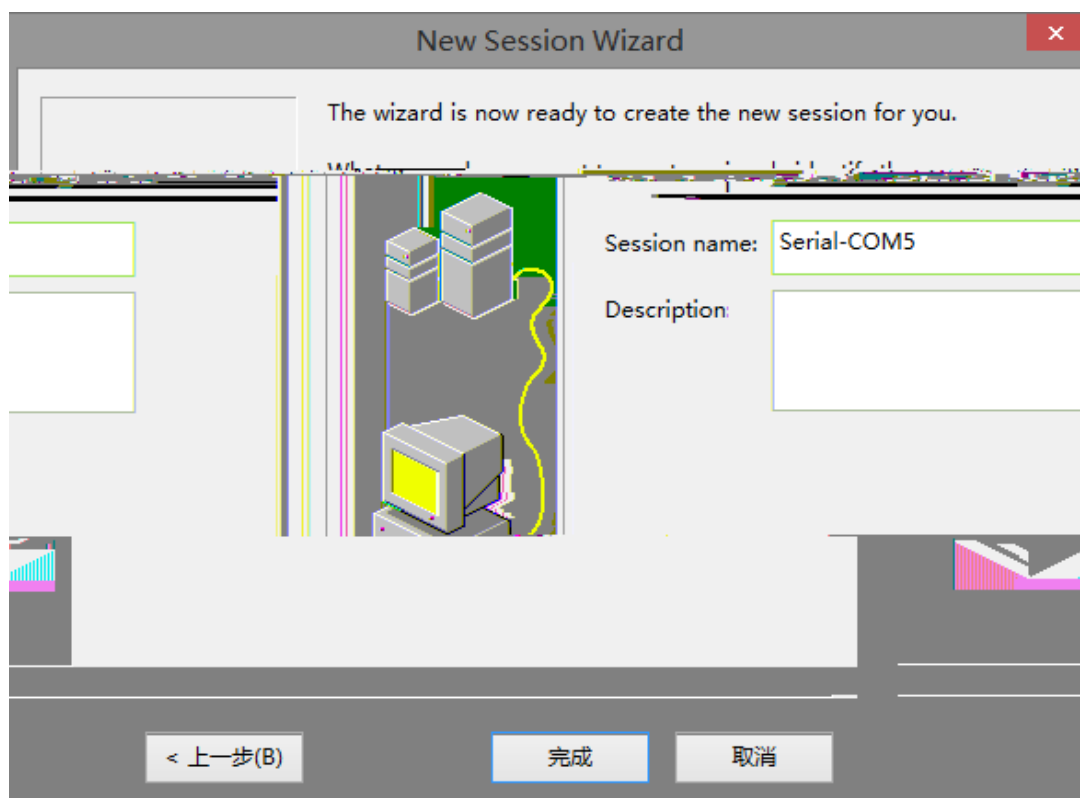


5

5.1

RG-WALL1600-M5100E V2.0

5-1 RG-WALL1600-M5100E V2.0

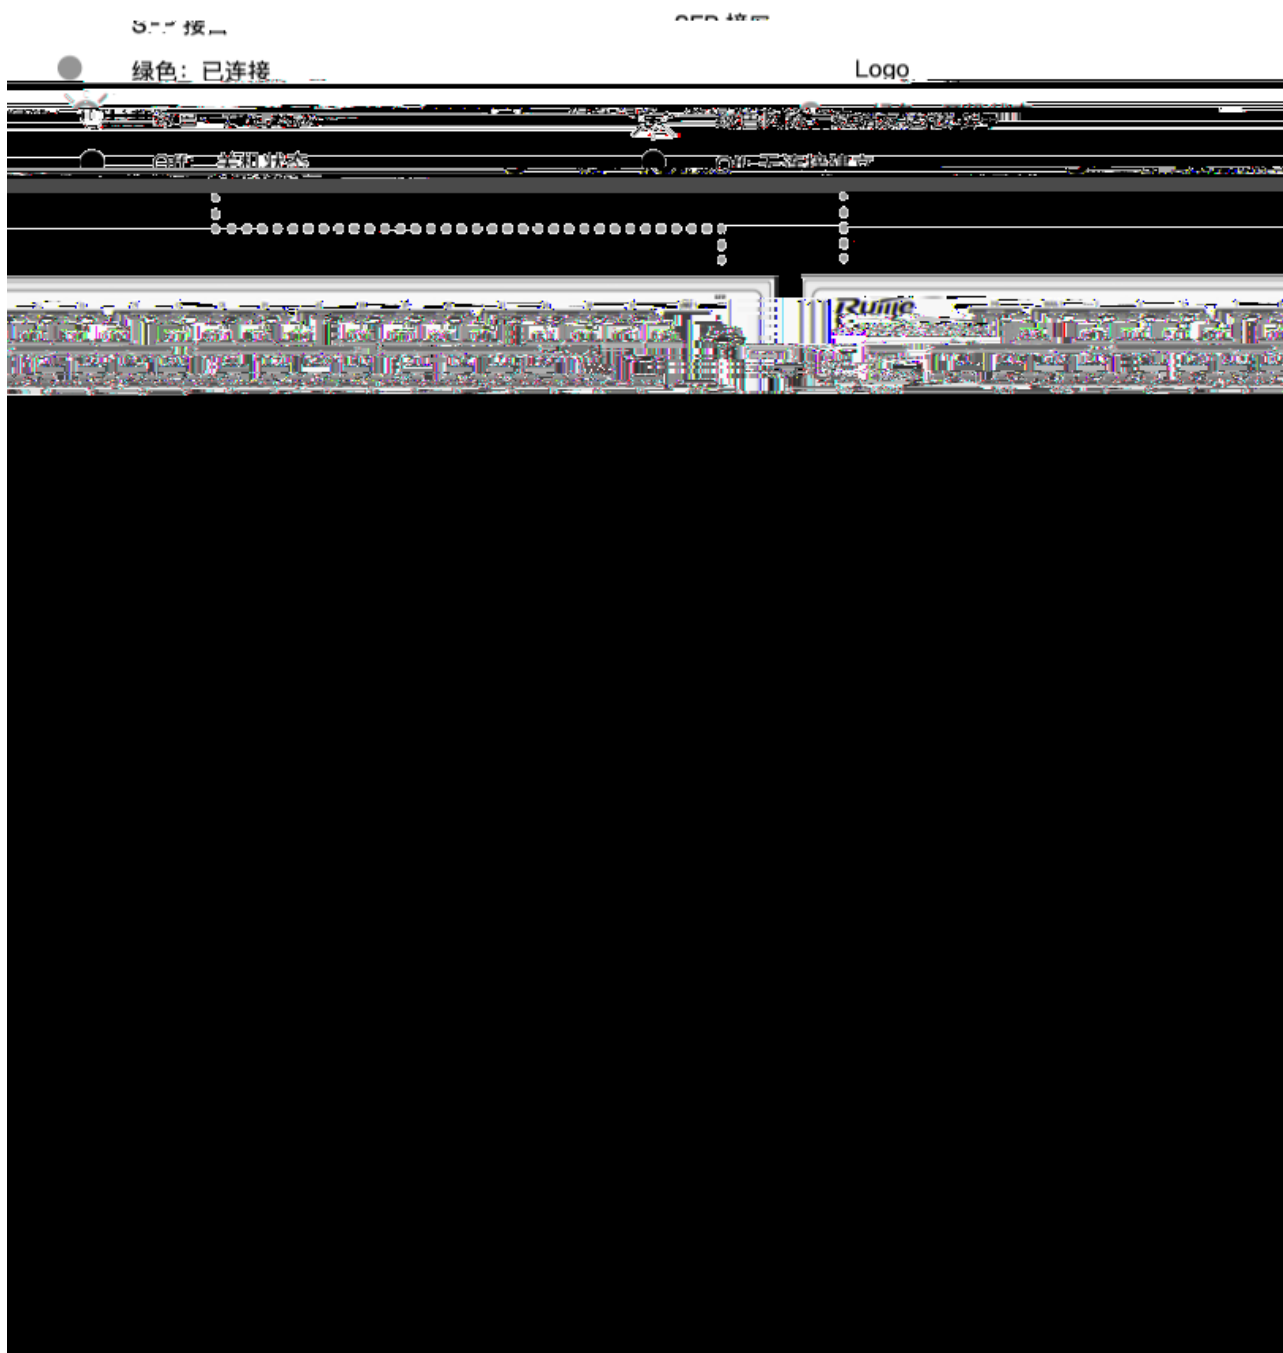

RG-WALL1600-M5100E V2.0

RG-WALL1600-M5100E V2.0

Internet

Telnet


RG-WALL1600-M5100E V2.0

RG-WALL1600-M5100E V2.0

5.2

6

6.1

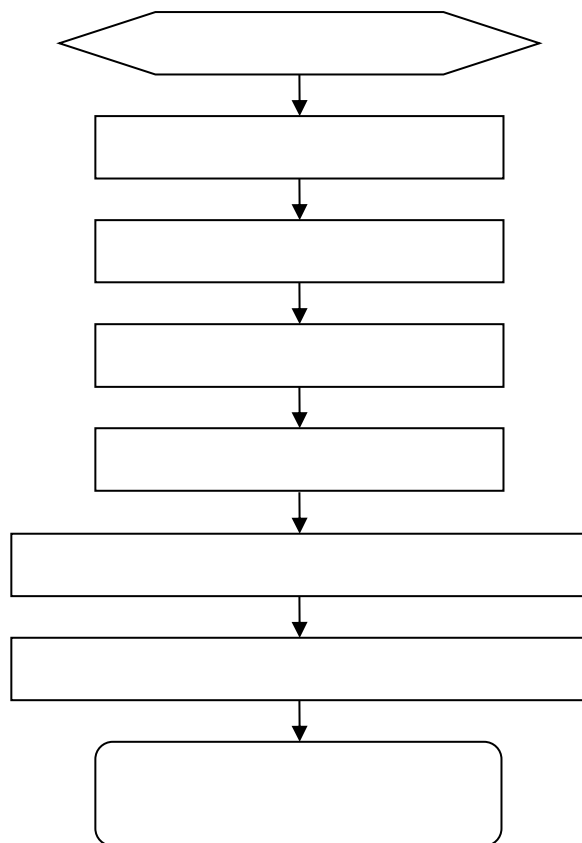

6.2

1

2

Status

Power

3

4

5 **link**

link

1

2


1310nm

1550nm

3

4

A 4



В 2^ i 7- n X j FG é C>Û.ä'TM ®

RG-WALL1600-M5100E V2.0


84

19

7

+e56F'e56F'

5

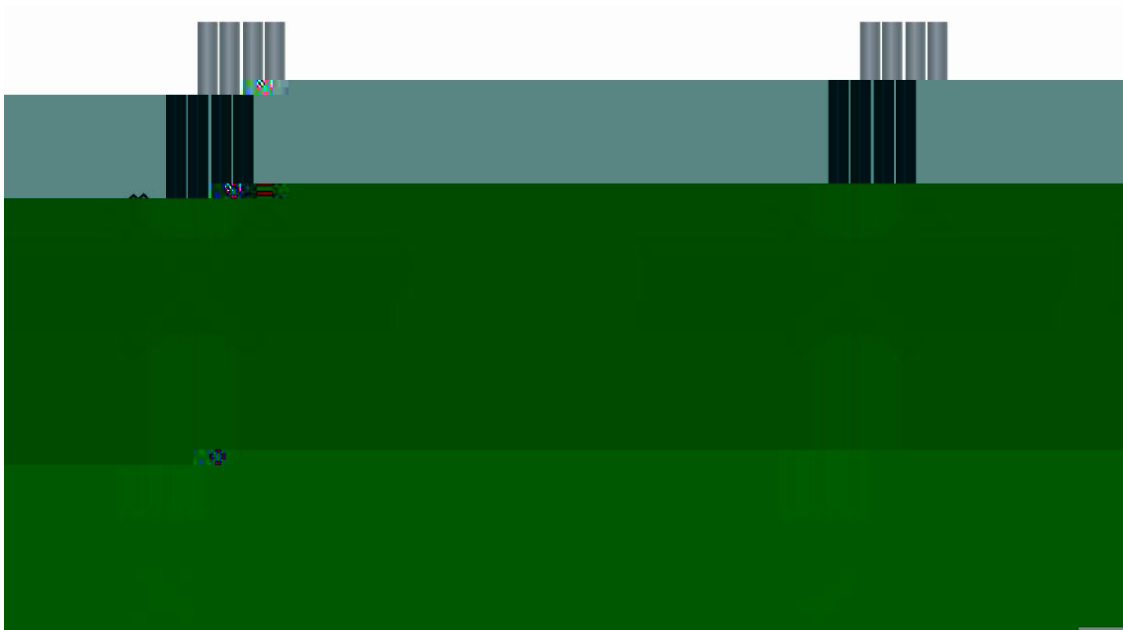

D-3

D-3



220V

-48V

D-4

D-4

10	mm	mm
----	----	----