

RG-MCP_1.35_Build20160318

V1.0

copyright 2013-2016



- <http://www.ruijie.com.cn/>
- <http://webchat.ruijie.com.cn>
- <http://www.ruijie.com.cn/service.aspx>
- 7 × 24 4008-111-000
- <http://bbs.ruijie.com.cn/portal.php>
- <http://www.ruijie.com.cn/service/know.aspx>
- 4008111000@ruijie.com.cn

	½ P H	C S	"I n	E	l ã	C	I "H	x'	ó s	.	n	B	O C
	H	C S	"I n	M 6 l		C	I "H	x'	ó s	.	U	n	, n C
	H	C	u Я W i	i	,	C	I "H	x'	ó b á.		"H I	C	
	Ψ /Ξ ω	Ç	» H	C	u Ψ	n	Ξ ω	Ç	» l	C			

1

1.1

1.1.1

CPU	4 2.0GHz	
	24G	
	1T	
	Centos 6.6()	X64

()

/ Linux 204800MB
 /tmp
 10240MB
 swap 1~2 32G 64GB
 /project 204800MB
 /bak: 204800MB
 /mcp
 100G

MCP centos

IP

80	80	TCP		MCP
3478	3478	UDP		MCP
3479	3479	UDP		MCP
22	22	TCP		MCP SSH


```

Disk /dev/sdb: 53.7 GB, 53687091200 bytes
255 heads, 63 sectors/track, 6527 cylinders
Units = cylinders of 16065 * 512 = 8225280 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disk identifier: 0x502626b1

    Device Boot      Start         End      Blocks   Id  System
   /dev/sdb2            1         6527      5242896    8e  Linux LVM

```

U /mnt mount -o loop /dev/sdb2 /mnt/ mount tmp

```

/dev/sdb2 57140 05271 22390/104 8e Linux LVM

```

```

Disk /dev/sdb: 53.7 GB, 53687091200 bytes
255 heads, 63 sectors/track, 6527 cylinders
Units = cylinders of 16065 * 512 = 8225280 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disk identifier: 0x502626b1

    Device Boot      Start         End      Blocks   Id  System
   /dev/sdb2            1         6527      5242896    8e  Linux LVM

```

1.1.3.3. http/ftp ISO

```

MCP http/ftp http/ftp
/ ( http http HFS wget http://
) wget

cd /home home
wget http://172.18.3.33/RG-MCP_v1.35_Build20160318.iso
home wget xxx

ftp wget ftp://ftp :ftp @ / /
wget ftp://www@192.168.0.1/mcp/RG-MCP_v1.35_Build20160318.iso
ISO mount -o loop / / /mnt/

home
mount -o loop /home/RG-MCP_v1.35_Build20160318.iso /mnt

```

mount


tmp

tmp

1.1.4

CRT

UTF8

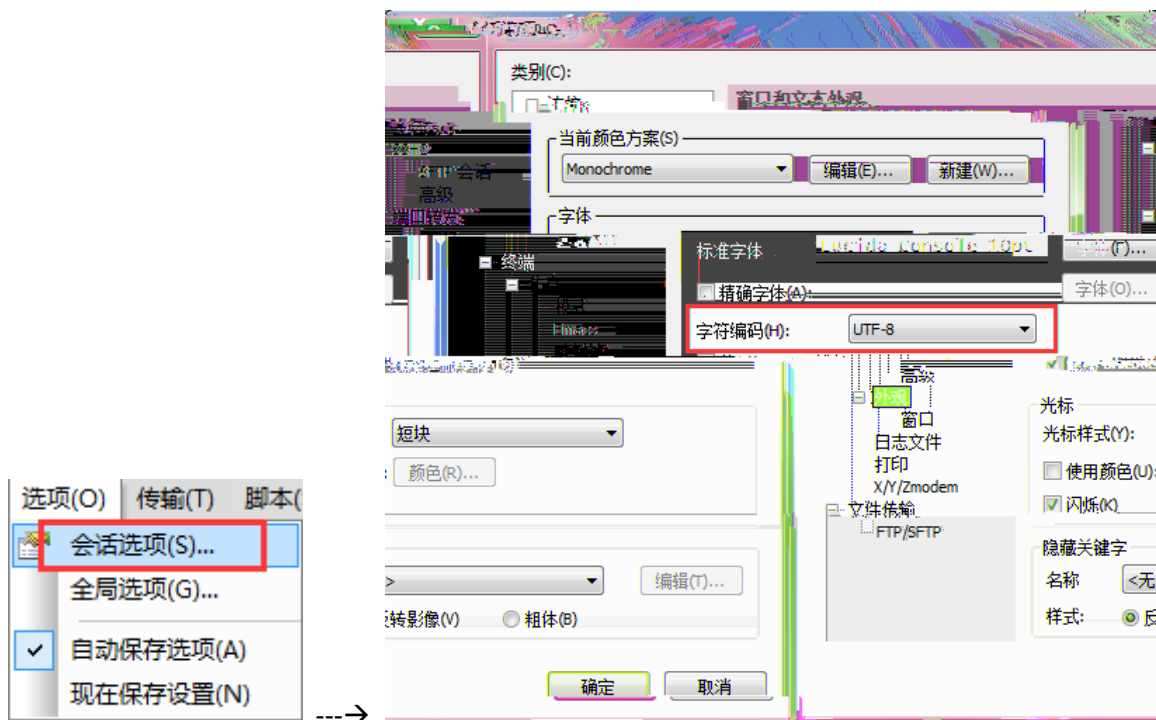

1.2

1.2.1


ISO

/mnt

cd /tmp tmp

cp -r /mnt/* /tmp ISO tmp

./install.sh.x

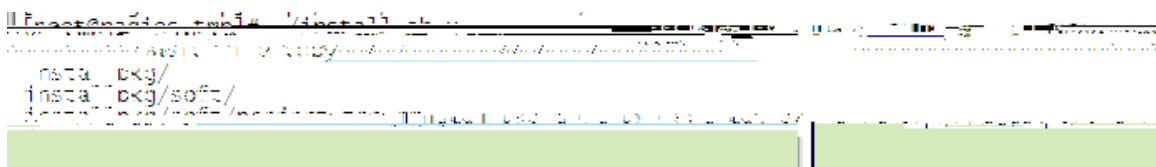

install.sh.x

ERROR

[root@naïos tmp]#

MCP

1.2.2 T@†Ô83(IP 0 0 10.174 0 Td [(M)-3(C9.967 /C2_0 1 6EA09F1 <0676.7>-


```
1          soft          cd /bak/soft/
```

```
./setInternetNetwork.sh.x -localhostip 172.18.117.94 -internetip 210.210.210.210 -rootpw ADMINadmin123
```

1	-localhostip	IP		IP		IP
Ps	-localhostip	IP				
2	-internetip	IP	NAT	IP		IP
Ps	-internetip	IP				
3	-rootpw	root				
12						
Ps						

1.2.3

1.2.3.1. MCP

jps -l (crt)

```
[root@localhost ~]# jps -l
4491 sun.tools.jps.Jps
3071 ./data.jar
3272 ./redis-consumer.jar
3007 ./org.apache.hadoop.mapreduce...
```

```
[root@localhost ~]# netstat -an |grep 3479
udp      0      0 :::ffff:127.0.0.1:3479    :::*           off (0.00/0/0)
udp      0      0 :::ffff:172.18.34.147:3479 :::*           off (0.00/0/0)
[root@localhost ~]#
```

```
root@localhost ~# netstat -an|grep 80
```

tcp	0	0	0.0.0.0:80	0.0.0.0:*	LISTEN	off	(0.00/0/0)
tcp	0	0	::ffff:127.0.0.1:8006	:::*	LISTEN	off	(0.00/0/0)
tcp	0	0	:::8010	:::*	LISTEN	off	(0.00/0/0)
tcp	0	0	:::8080	:::*	LISTEN	off	(0.00/0/0)
tcp	0	0	:::20880	:::*	LISTEN	off	(0.00/0/0)
tcp	0	0	::ffff:127.0.0.1:8080	::ffff:127.0.0.1:41509	TIME_WAIT	timewait	(21.80/0/0)
tcp	0	0	::ffff:172.18.3.62:57178	::ffff:172.18.3.62:20880	ESTABLISHED	keepalive	(4468.41/0/0)
tcp	0	0	::ffff:172.18.3.62:57159	::ffff:172.18.3.62:20880	ESTABLISHED	keepalive	(4450.40/0/0)
tcp	0	0	0.0.0.0:80	0.0.0.0:	TIME_WAIT	timewait	(21.80/0/0)
tcp	0	0	::ffff:127.0.0.1:8080	::ffff:127.0.0.1:41509	TIME_WAIT	timewait	(21.80/0/0)
ESTABLISHED	and	yes	(0.00/0/0)	0	0	0	0
ESTABLISHED	and	no	(0.00/0/0)	0	0	0	0
unix	2			DGRAM			40180
unix	3			STREAM	CONNECTED		14180

1.2.3.3. log

ESC :q! [q]

```
vi /project/data/logs/data-middleware.log
```

```
vi /project/redis-consumer/logs/redis-consumer.log
```

```
vi /bak/soft/apache-tomcat-7.0.55/logs/catalina.out
```

error

1.2.3.4.

```
iptables -nL
```

```
[root@localhost ~]# iptables -nL
Chain INPUT (policy ACCEPT)
target     prot opt source                destination
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:22
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:80
ACCEPT     udp  --  0.0.0.0/0              0.0.0.0/0          udp dpt:3479
ACCEPT     udp  --  0.0.0.0/0              0.0.0.0/0          udp dpt:3478
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:3479
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:3478
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:70

Chain FORWARD (policy ACCEPT)
target     prot opt source                destination

Chain OUTPUT (policy ACCEPT)
target     prot opt source                destination
[root@localhost ~]#
```

1.2.3.5. MCP

MCP

mcp

1111111111

mcp



2

2.1 MCP

2.1.1 MCP

```
soft          cd /bak/soft/
sh -x restart_mcp.sh
```

```
[root@localhost ~]# cd /bak/soft/
[root@localhost soft]# sh -x restart_mcp.sh
```

log


error



1.2.3

<http://172.18.117.92>

IP

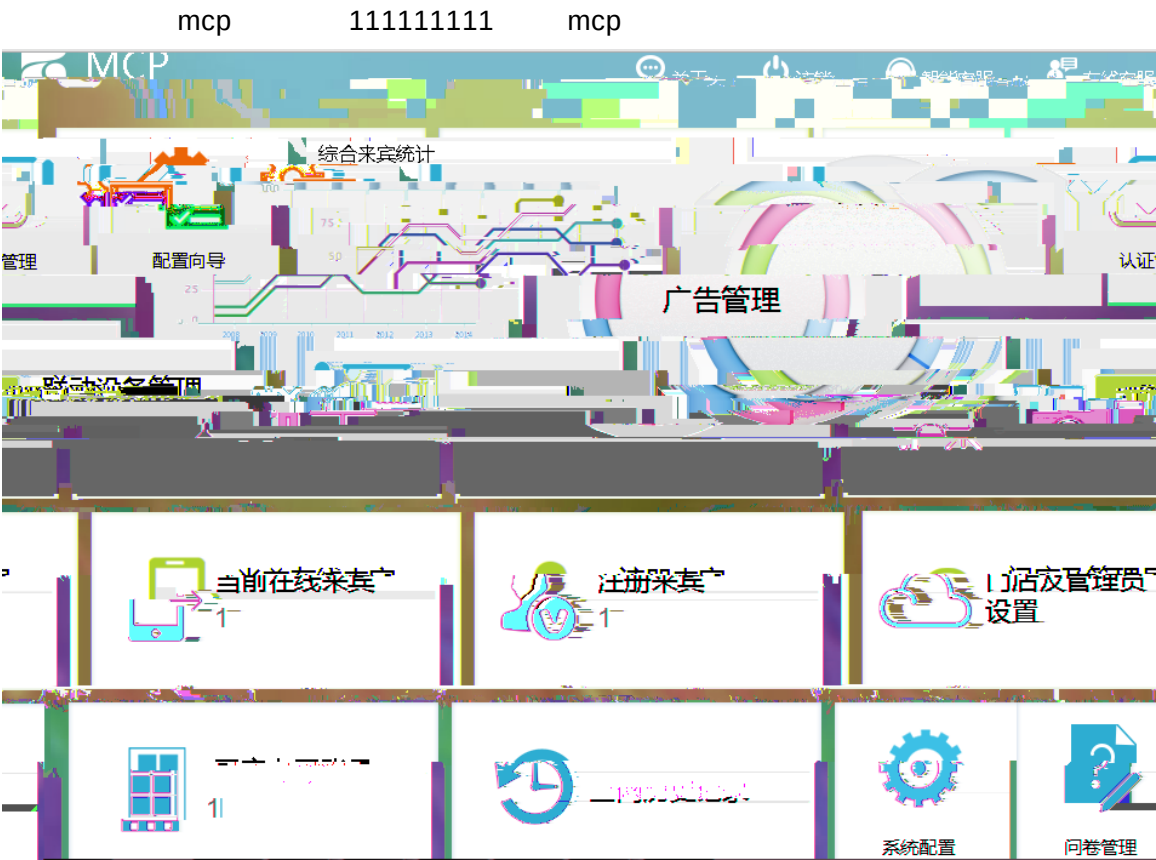

2.1.2 ip

```
ipMCP
setInternetwork.sh.x
businessconfig
vi /alidata/wmc_common_config/businessconfig.propertiesi
IPIPwq
```



```
upstream 172.18.86.160 {  
    server 127.0.0.1:8080 max_fails=2;  
}
```

```
upstream tr069 {  
    server 127.0.0.1:8080;  
    keepalive 1024;  
}
```

```
server {  
    listen      80;  
    server_name localhost;.....
```

如果是内网IP，则为本地网卡的IP地址。

```

}
location ~*.(gif|jpg|jpeg|js|css|bmp|png)$ {
    proxy_next_upstream error timeout http_500 http_502 http_504 http_404;
    proxy_read_timeout 20s;
    proxy_redirect      off;
    # nginx非80端口处理
    proxy_set_header    Host $host:$server_port;
    proxy_set_header    Cookie $http_cookie;
    proxy_set_header    REMOTE_HOST $remote_addr;
    # 获取真实IP
    proxy_set_header    X-Real-IP $remote_addr;
    # 获取代理者的真实ip
    proxy_set_header    X-Forwarded-For $proxy_add_x_forwarded_for;
    client_max_body_size 50m;
    client_body_buffer_size 128k;
    proxy_pass http://192.168.1.100:80;
    proxy_send_timeout 600s;
    proxy_buffer_size 4k;
    proxy_buffers 4 32k;
    proxy_busy_buffers_size 64k;
    proxy_temp_file_write_size 64k;
}

location / {
    proxy_next_upstream error timeout http_500 http_502 http_504 http_404;
    proxy_read_timeout 20s;
    proxy_redirect      off;
    # nginx非80端口处理
    proxy_set_header    Host $host:$server_port;
    proxy_set_header    Cookie $http_cookie;
    proxy_set_header    REMOTE_HOST $remote_addr;
    # 获取真实IP
    proxy_set_header    X-Real-IP $remote_addr;
    # 获取代理者的真实ip
    proxy_set_header    X-Forwarded-For $proxy_add_x_forwarded_for;
    client_max_body_size 50m;
    client_body_buffer_size 128k;
}

```


2.2 SecureFXPortable.exe



SecureFXPortable.exe

SFTP

linux


SecureFXPortable

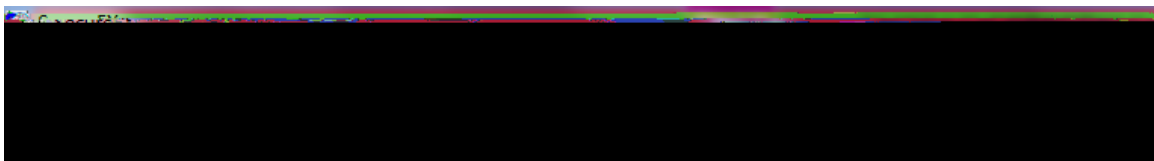

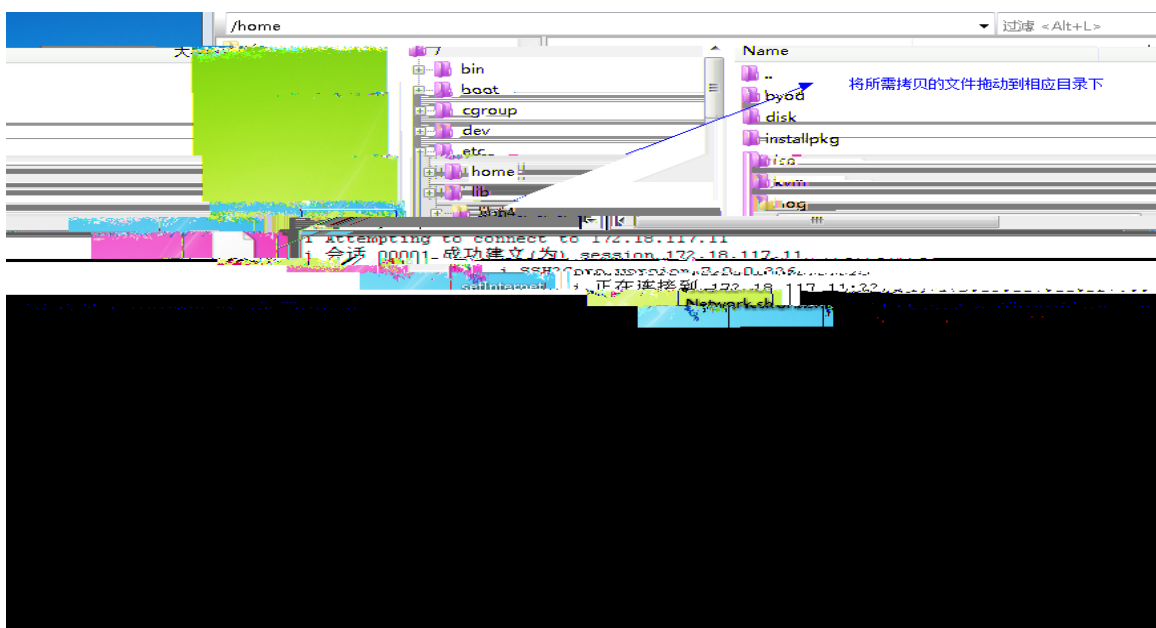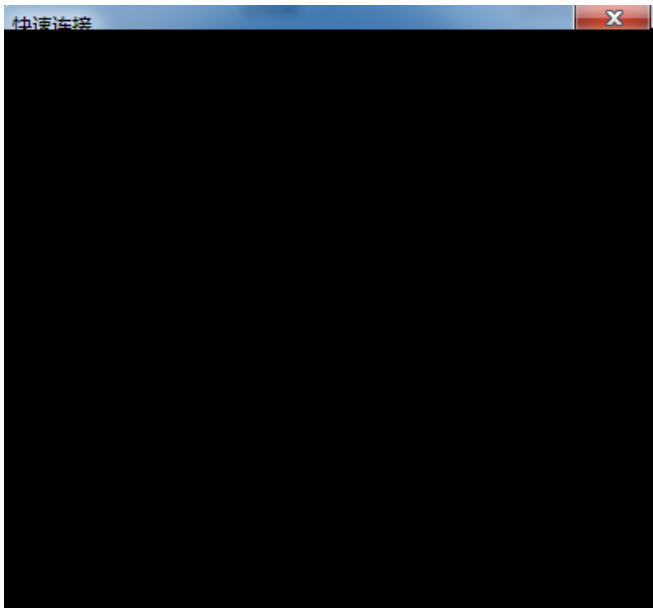


c S `

SCRT

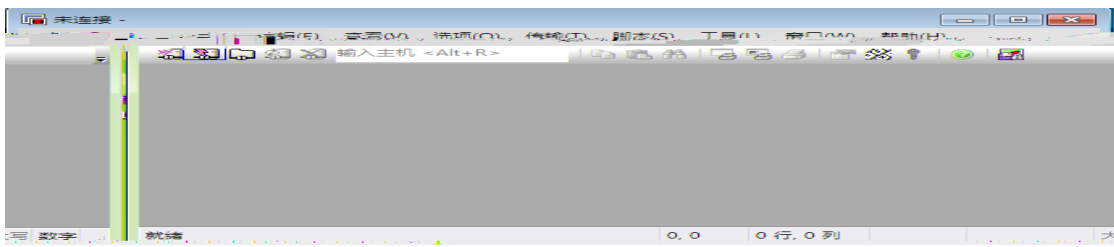

ip

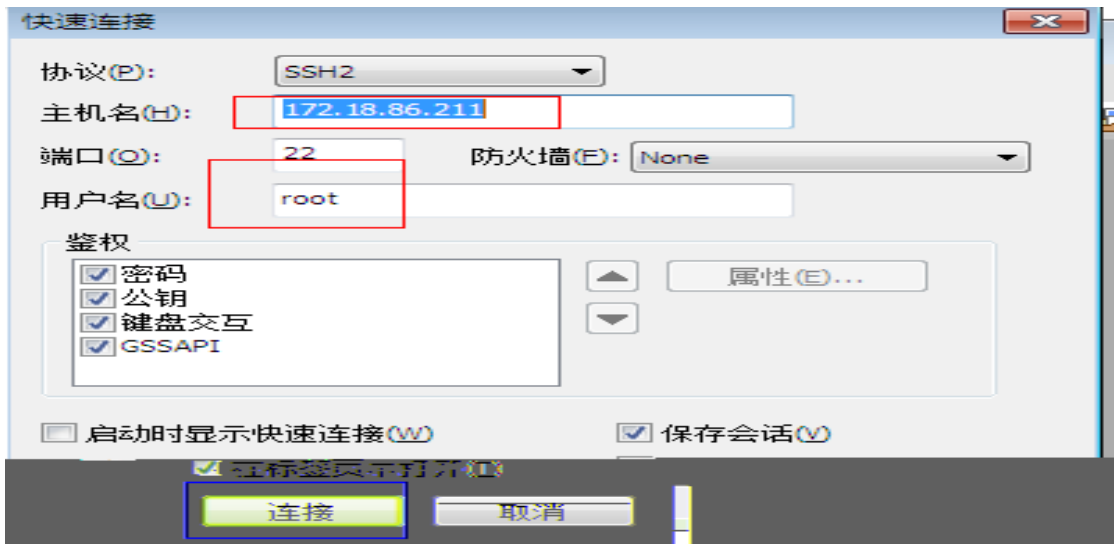

123456

